

Electric Antenna Stand EAS 1.5

Technical Data

Antenna height fixed	1.5 m
Total mast height	1.7 m
Load capability	max. 6 kg (when balanced)
For long and heavy antennas a counter weight is required to balancing the load	
Depending on the distance of the antenna centre of gravity	
Material	Plastic + reinforced fibreglass,
Mast cross-section	100 mm x 100 mm
Base L x W	0.9 m x 0.75 m
Moveable with 4 casters	
Electrical Polarisation	0°/90° (vert./hor.)
Positioning time 0°/90°	approx. 3 sec.
Motor	Brushless DC motor 200 W
Interference suppression:	20 dB under limits EN 55022 class B
Current consumption	max. 2A
Voltage	208-230 VAC, 50/60 Hz, single phase
Discharge current	25mA per drive unit (higher in the moment when powering on)
Control cable	Fibre optic lines
Remote control via	IEEE interface
Antenna support drive	Toothed belt
Material of toothed belts	Kevlar reinforced (non-metallic)
Temperature range	+10 °C...+35 °C
Total weight	approx. 30 kg
Accessories	Interface to SCU/MCU/NCD Controller 1.5 m power supply cable Service manual

Brief description


The Electric Antenna Stand **EAS 1.5** is specifically designed for measurements in electromagnetic absorption chambers at a fixed measuring height. Other fixed antenna heights are available upon request.

The antenna mast, with the exception of the drive unit, is fabricated from plastic (PVC and reinforced fibreglass). Metal parts are located only in the base plate and the drive mechanism (max. 0.3 m above ground level).

Antenna Adapters for all commercially available antennas are available upon request.
All antennas during polarisation rotate around their axis to eliminate any elevation errors.

The **IEEE 488.2 (GPIB) bus** provides an additional control option for all functions, when operated with the **SCU/MCU or NCD Controller**.

Electric Antenna Stand EAS 1.5

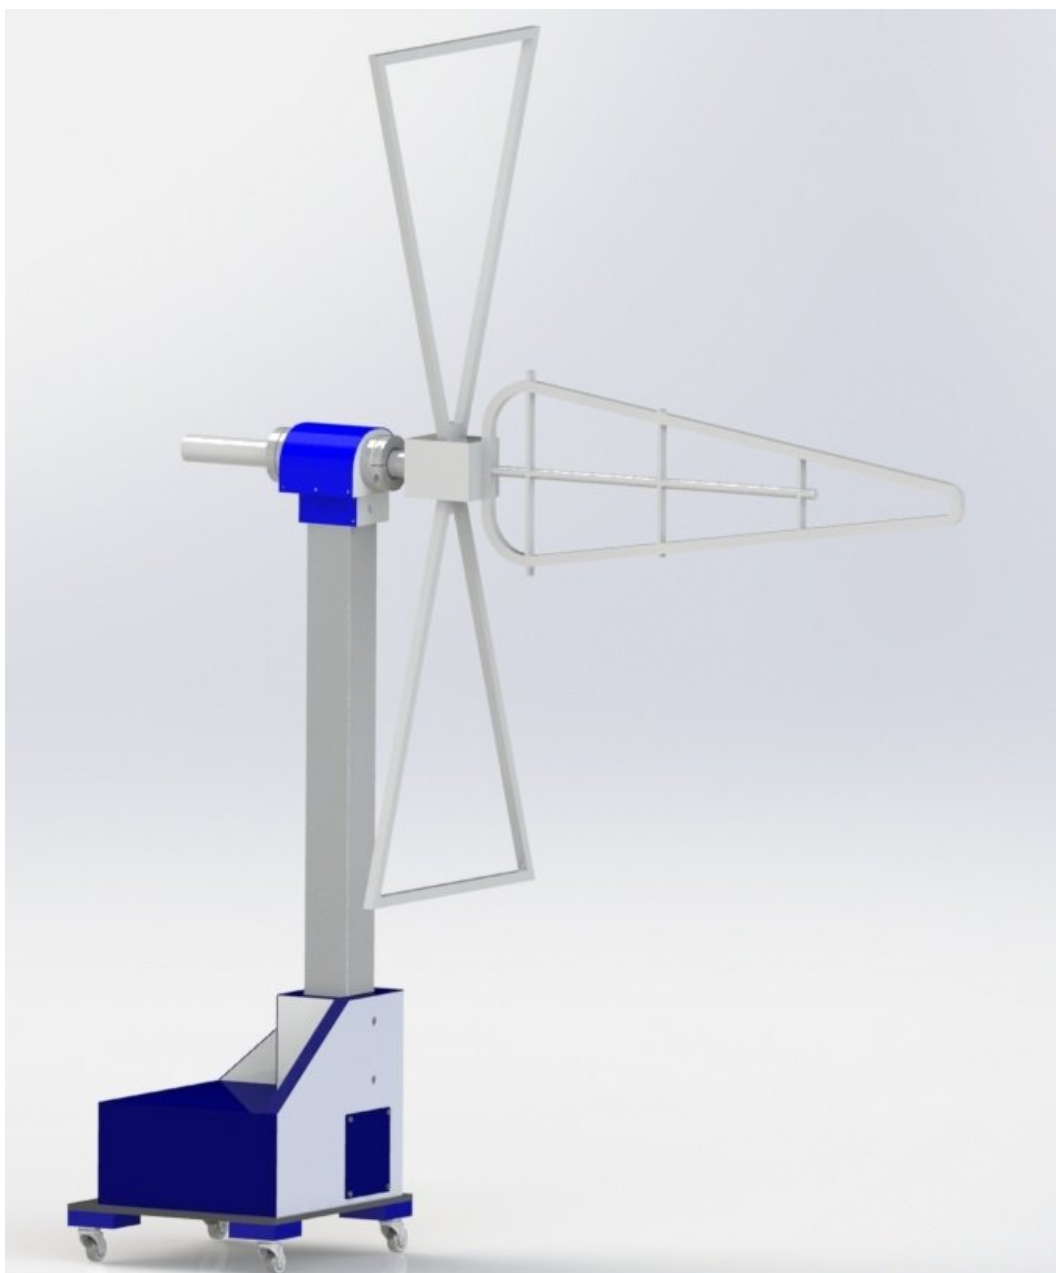

Information presented enclosed is subject to change as product enhancements are made regularly.
Pictures included are for illustration purposes only and do not represent all possible configurations.